


TECHNICAL SPECIFICATION

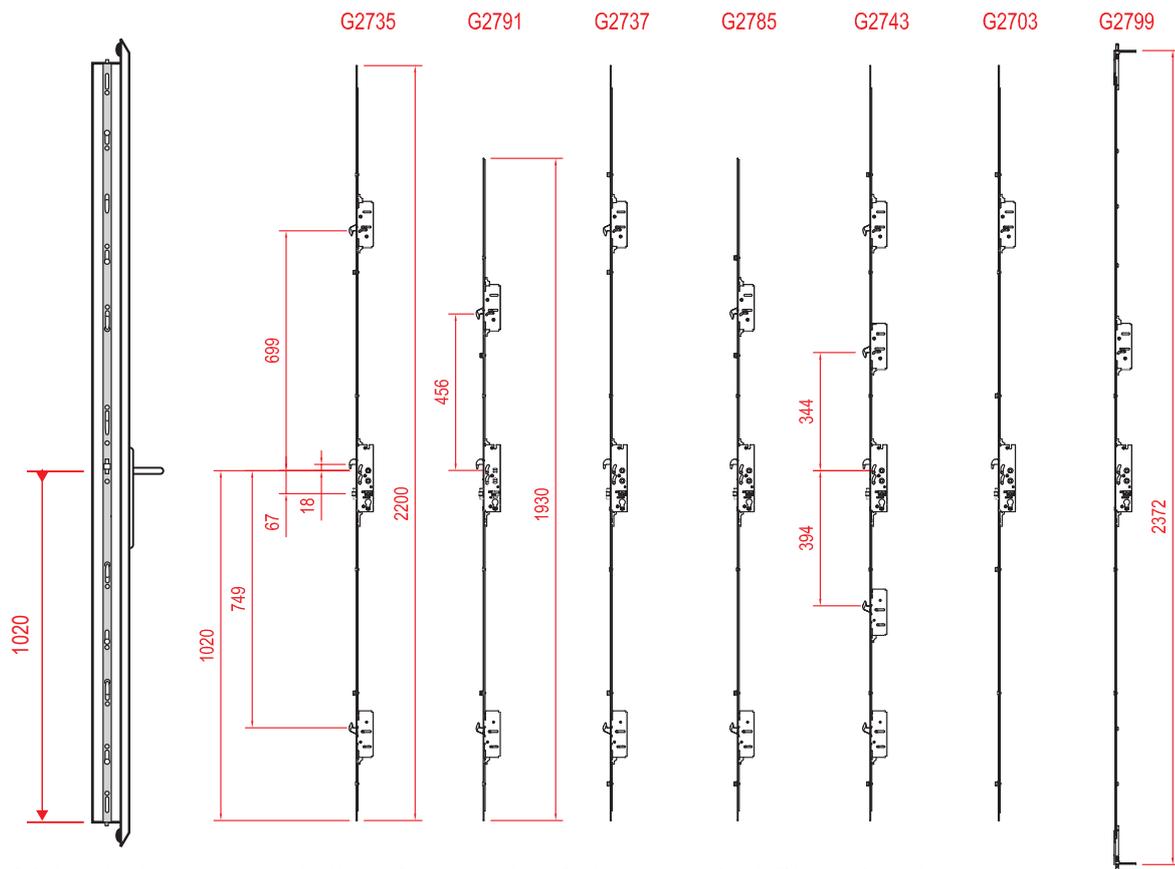

All door locks are twin spindle and accept shootbolts as standard (Dimensions in mm).
Suitable for all front, back and french doors.

	Eurogroove Heights (mm)			
	Without Shootbolts		With Shootbolts	
1. High Security 3 Hook Std Height Doors	Min	Max	Min	Max
G2735 3 Hook 2 Mid Board Rollers	1870	2200	1985	2210
G2737 3 Hook 2 Mid 2 Outboard Rollers	1950	2200	1985	2210
G2723 3 Hook 2 Outboard Rollers	1950	2200	1985	2210
G2721 3 Hook	1870	2200	1985	2210
2. High Security 3 Hook Low Height Doors	Min	Max	Min	Max
G2791 3 Hook 2 Mid Board Rollers	1620	1930	1745	2005
G2785 3 Hook 2 Mid 2 Outboard Rollers	1720	1930	1745	2005
G775 2 Hook 2 Outboard Rollers	1720	1930	1745	2005
G2777 3 Hook	1620	1930	1745	2005
3. High Security 5 Hook Lock	Min	Max	Min	Max
G2743 5 Hook 2 Outboard Rollers	1870	2200	1985	2210
G2741 5 Hook	1870	2200	1985	2210
4. Std 1 Hook 4 Roller Lock	Min	Max	Min	Max
G2703 Centre Hook 4 Roller	1870	2200	1985	2210
G2771 Centre Hook 4 Roller Low Doors	1660	1930	1745	2005
5. Slave French Door Lock	Min	Max	Min	Max
G2799 Slave Lock Inc Top/Bottom Shootbolts	N/A	N/A	1610	2210

All of the above dimensions are the lengths of the Eurogroove required and assuming the recommended handle height of 1020mm from the bottom of the Eurogroove is used.

Factory Address

Yale UK

Spruce Way, Castleside, Consett
County Durham, DH8 8JB

Direct Sales Tel: +44 (0)1207 581485

Direct Sales Fax: +44 (0)1207 589816

Marketing Tel: +44 (0)1902 364006 Email: oem_info@yale.co.uk www.yale.co.uk

Office Address

Yale UK

School Street, Willenhall,
West Midlands DH8 8JB

General Tel: +44 (0)1902 364647

General Fax: +44 (0)1902 364692

THE YALE BRAND, with its unparalleled global reach and range of products, reassures more people in more countries than any other consumer locking solution.

THE ASSA ABLOY GROUP is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.



Yale®

The world's favorite lock

The G2000 lock has been designed to meet a range of requirements specified by PVCu, aluminium, composite and timber door producers and delivers a number of performance benefits.

Yale is the world's leading lock manufacturer, and is recognised by over 98% of your customers.

TOP & BOTTOM HO

- Reverse hook bolts for anti-lift
- Assists door compression and reduces door bow
- High level of security against attack

CENTRE HOOKBOLT

- Extra level of security in centre of door
- Assists in door compression
- High level of security against attack

DEADLOCKING LATCH/NIGHTLATCH

- Easily reversible latch for re-handing the lock
- Nightlatch function achieved by using bottom follower
- Key operation from outside of door to withdraw the latch bolt

ADJUSTABLE ROLLER

- Provides a tight weatherproof seal down the full length of the door
- Increased smoother and lower operational forces
- Less wear on hooks
- Adjustable 1.5mm to right or left of centre

PROFILE RELATED PACKER

- Suits the majority of profile systems

YALE DOOR HANDLES

- Round bar lever / lever & lever / pad
- Scrolled lever / lever & lever/pad
- Available in white, gold, silver and black
- Tested in accordance to Cycle tested to over 20000 cycles



HOOKBOLT



LOCK MARKINGS FOR EASY FABRICATION AND INSTALLATION

- V-notches either side of hooks line up directly with v-notches on keeps
- V-notches assist process for fabrication and installation
- When lining up v-notches on lock face plate and v-notches on keeps you get optimum hook and roller engagement for superior door performance



YALE EURO-PROFILE CYLINDERS

- CEN Grade 3
- Secure by design licensed
- 6 Pin Anti-pick, anti-drill
- Full size range, available
- Keyed-alike available and keyed-alike in pairs



SHOOTBOLT KEEP

- Top plate adjustable to increase and decrease compression
- Compatible with resi and french doors



SHOOTBOLT

- Adjustable shoot bolts can be adjusted to increase or decrease the engagement into the keeps
- Allows for doors that are not perfectly aligned therefore making the installation process that much easier
- Spanner or screwdriver adjustable in all applications
- Flat side of bolts allow extra 1.5mm of tolerance for tighter installation



STAINLESS STEEL FACEPLATE, ROLLERS AND STRIKERS

- Tested beyond requirements of BS EN 1670 1998 Class 4
- Provides high level of corrosion resistance for long lasting performance

ONE PIECE STRIKE

- Added strength, security and durability
- Adjustable hooks, roller and centre latch plate up to 6mm (+/- 3mm)
- Designed to meet the requirements of PAS 23/24
- Frame fixing slots (hides fixings once installed)
- No need to remove one piece striker during installation, frame fixing slots are incorporated in keep
- One notch lined up with keep lines the whole door up giving you speed of fabrication and installation




INTEGRAL HOOK AND ROLLER KEEP

- Added strength, security and durability
- Enhanced aesthetics with keep end tidy
- Designed to meet the requirements of PAS 23/24
- 3 keeps for fast fabrication
- Adjustable hooks, roller and centre latch plate up to 6mm (+/- 3mm)





The world's favorite lock

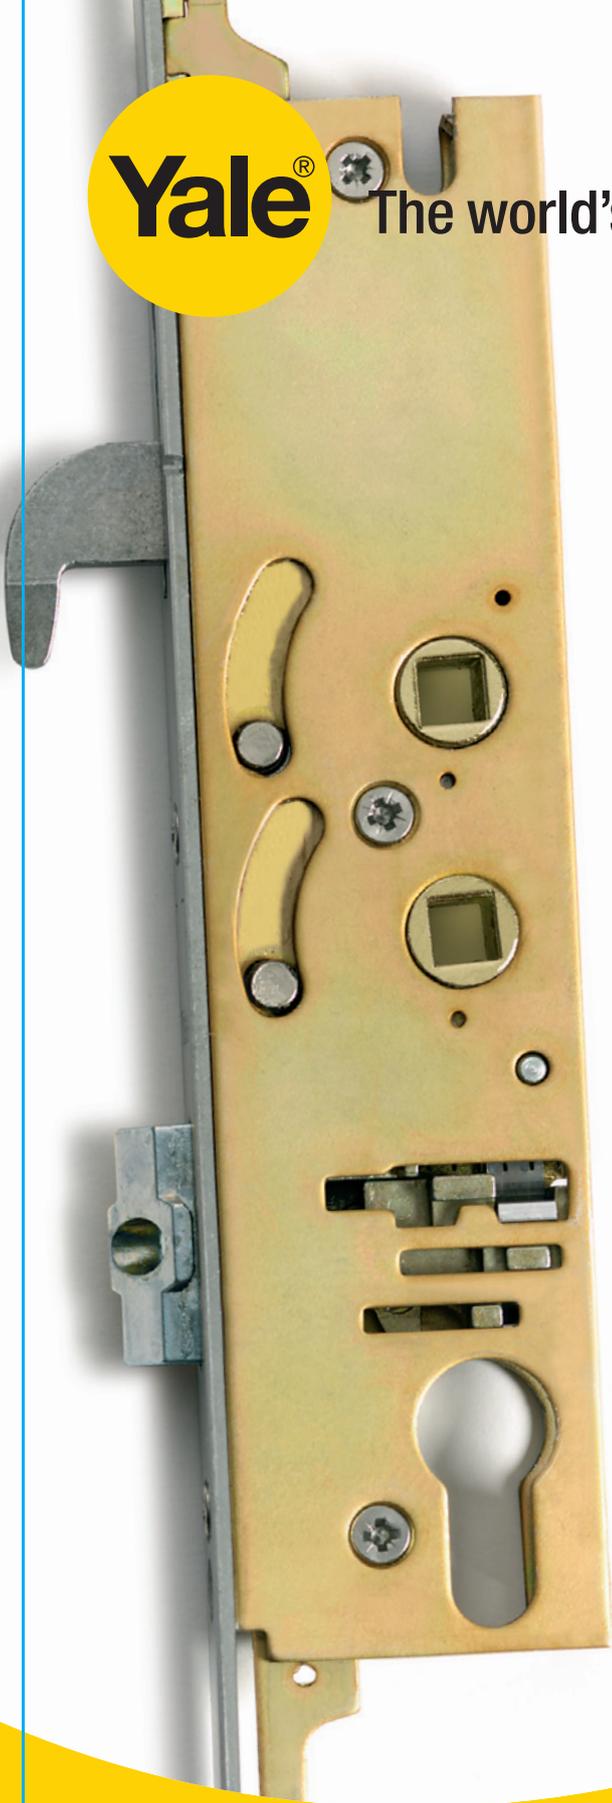

Yale Multipoint lock suitable for PVCu, aluminium, composite and timber doors
G2000